

## Condizioni di funzionamento

Temperatura acqua calda

**max 70°**

Pressione di flusso raccomandata

**2-5 Bar**

Nel caso di pressione superiore 5 Bar è necessario installare un riduttore di pressione.

Le immagini sono puramente indicative: non rappresentano nello specifico alcun prodotto ma hanno il solo scopo di fornire adeguate e semplici istruzioni per il montaggio del prodotto.

## Operating conditions

Temperature of hot water

**max 70°**

Recommended flow pressure


**2-5 Bar**

If pressure is above 5 Bar, a pressure reducer must be installed.

Images are approximate only: they don't represent specifically any product, but they have the sole propose to provide adapt and simple instructions for product installation.


Doccia incasso orizzontale meccanico e deviatore integrato  
Horizontal manual shower mixer with integrated diverter


1

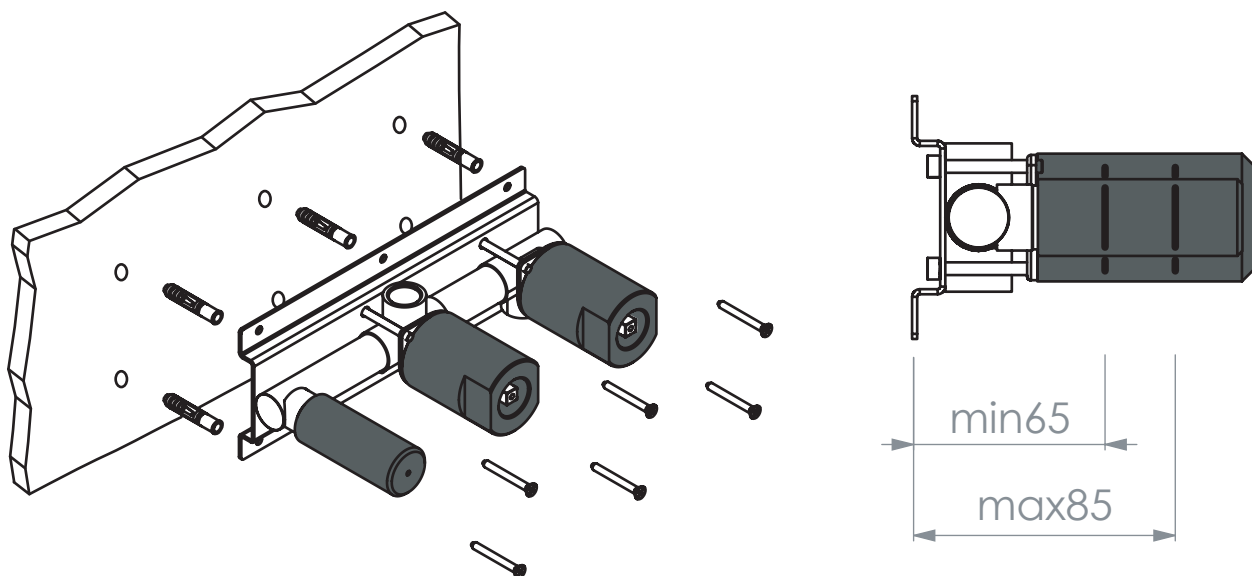

2

|        |       |
|--------|-------|
| TIB80N | TBN82 |
| RAJ80N | RJN82 |
| H5T80N | H5N82 |
| H4U80N | H4N82 |
| MME80N | MMN82 |
| MCN80  | MCN82 |
| IKO80N | IKN82 |
| MIK80N | MKN82 |
| ALN80  | ALN82 |
| VIK80N | VKN82 |
| RNN80  | RNN82 |
| TEO80N | TEN82 |
| JAG80N | JGN82 |
| VIK80N | VKN82 |
| FUR80N | FRN82 |

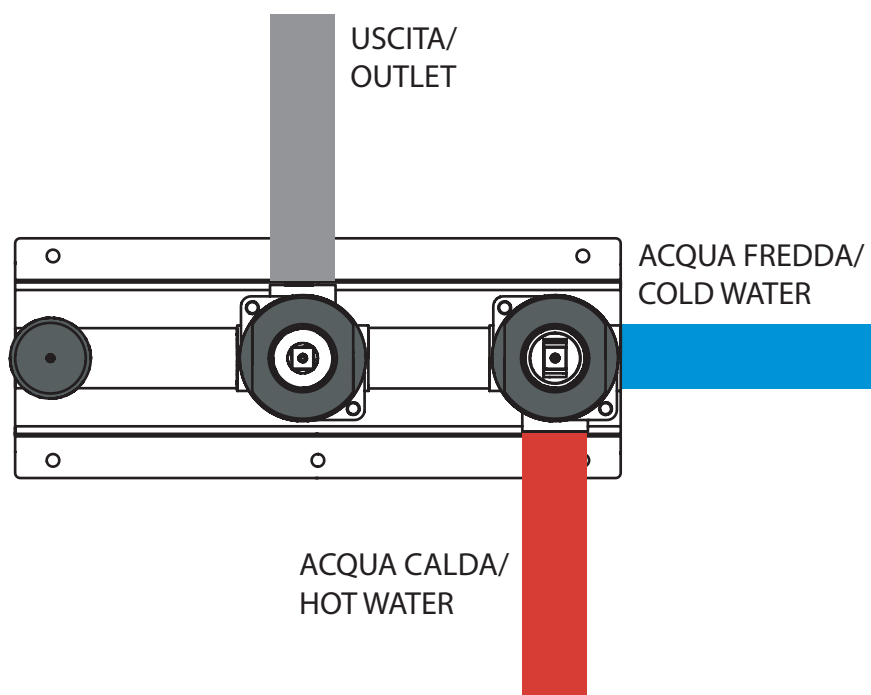

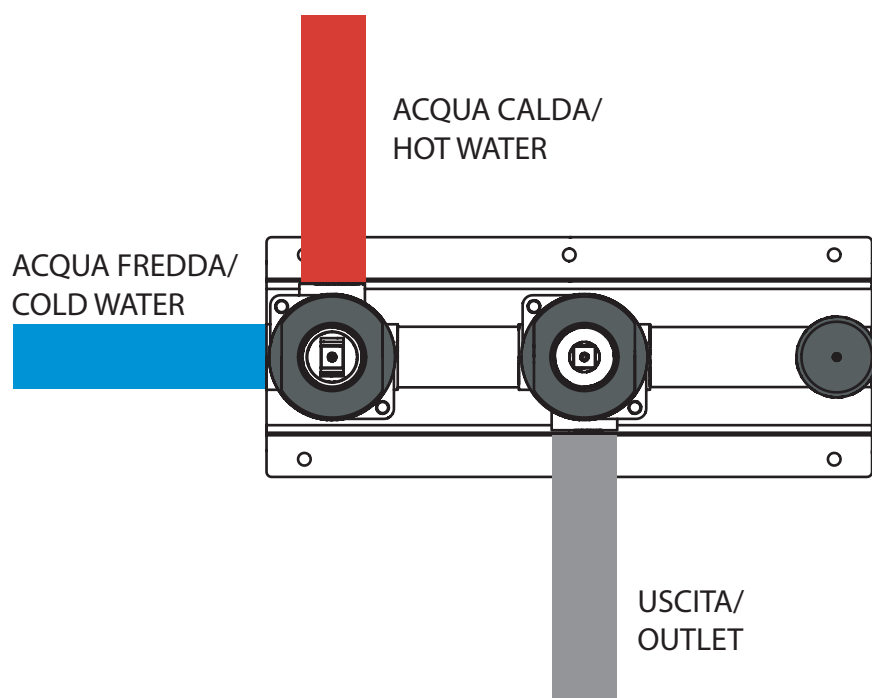

|                                |                              |
|--------------------------------|------------------------------|
|                                |                              |
| <b>KOE80N</b><br><b>HUG80N</b> | <b>KON82</b><br><b>HGN82</b> |

